

Make Object

Block Group:	Logic
Icon:	No icon

Takes input key/value pairs and returns a JSON object.

For information on using dataflow blocks, see [Dataflow](#).

Input/Output Properties

The Make Object block can have a variable number of properties, for which you specify names. Each of these properties can take input and give output.

Output Property

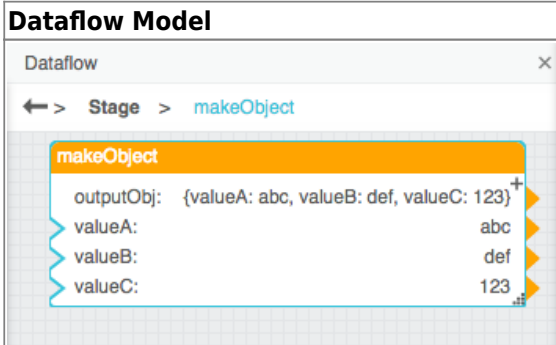
This property can give output. It cannot take input.

- outputObj (*JSON object*)

outputObj returns a JSON object that comprises the input key/value pairs.

Model

This is a basic use of the block.

Dataflow Model		Description								
	<table border="1"> <tr> <td>outputObj</td> <td>{valueA:"abc",valueB:"def",valueC:"123"}</td> </tr> <tr> <td>valueA</td> <td>abc</td> </tr> <tr> <td>valueB</td> <td>def</td> </tr> <tr> <td>valueC</td> <td>123</td> </tr> </table>	outputObj	{valueA:"abc",valueB:"def",valueC:"123"}	valueA	abc	valueB	def	valueC	123	<p>The three input pairs are contained in the output JSON object.</p>
outputObj	{valueA:"abc",valueB:"def",valueC:"123"}									
valueA	abc									
valueB	def									
valueC	123									

[Previous: Catch Error](#)

[Next: Map Series Data](#)

From:
<https://wiki.dglogik.com/> - **DGLogik**

Permanent link:
https://wiki.dglogik.com/dglux5_wiki:dataflow:dataflow_blocks_reference:logic:make_object

Last update: **2021/09/20 15:03**

