Make Object

Block Group:	Logic
Icon:	No icon

Takes input key/value pairs and returns a JSON object.

For information on using dataflow blocks, see Dataflow.

Input/Output Properties

The Make Object block can have a variable number of properties, for which you specify names. Each of these properties can take input and give output. Add a property with the plus sign; its name becomes the key in the output object.

Numbers, strings, booleans, null values and JSON objects/arrays are copied as they are. A table is converted to an array of row objects (one object per row, keyed by column name). Other values (such as events) become null.

Output Property

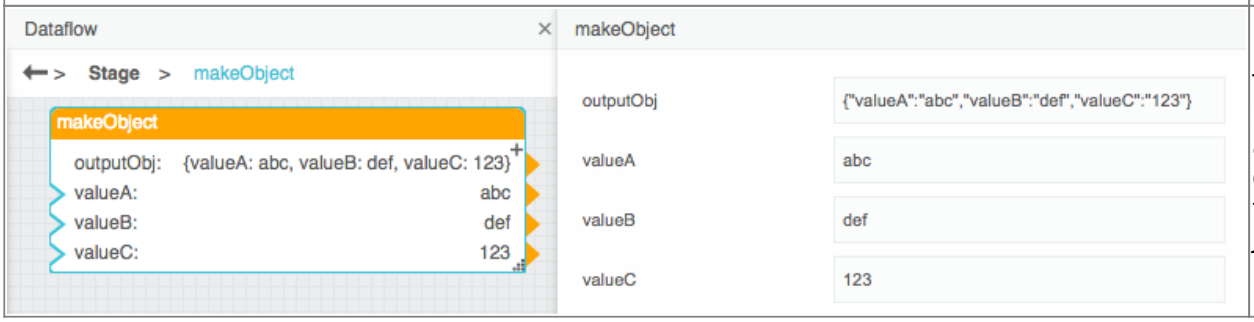
This property can give output. It cannot take input.

- outputObj *(JSON object)*

outputObj returns a JSON object that comprises the input key/value pairs.

Model

This is a basic use of the block.

Dataflow Model	Description
	The three input pairs are contained in the output JSON object.

Previous: Catch Error

Next: Map Series Data

From:
http://wiki.dglogik.com/ - **DGLogik**

Permanent link:
http://wiki.dglogik.com/dglux5_wiki:dataflow:dataflow_blocks_reference:logic:make_object

Last update: **2026/10/22 13:27**