CSV Writer

Block Group:	Table Operations
Icon:	

The CSV Writer block takes an input table and returns the table as a CSV string.

For information on using dataflow blocks, see Dataflow.

For answers to some common questions about working with tables, see Tables.

Input/Output Properties

The following properties of the CSV Writer block can take input and give output.

- input *(table)*
- withHeader *(boolean)*

input receives the table that you want to write as a CSV string.

withHeader specifies whether the output CSV string starts with a header row that contains the column names. The `row` column is never written.

Output Properties


The following property of the CSV Writer block can give output but cannot take input.

- output *(string)*

output returns a CSV string of the input table.

Example

The following image demonstrates an example of the CSV Writer block. In this example, a table with headers is converted to a CSV string.

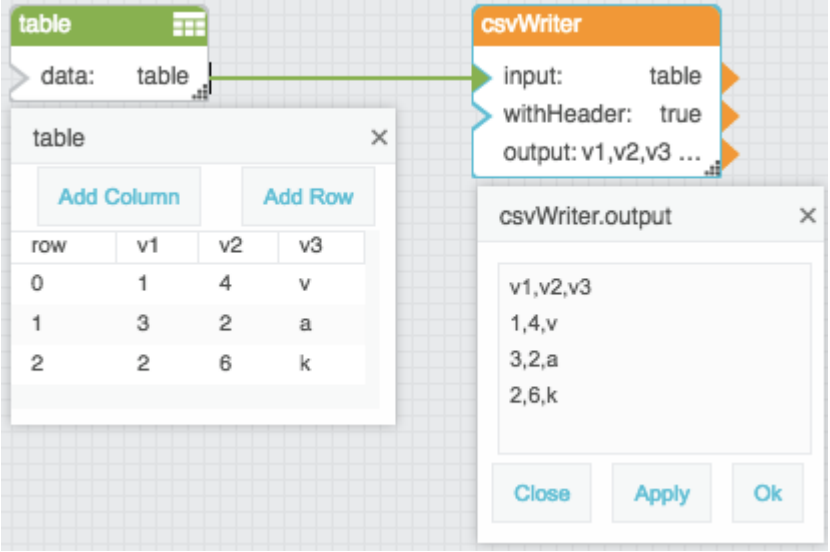

Previous: CSV Parser

Next: JSON Parser

From:
http://wiki.dglogik.com/ - **DGLogik**

Permanent link:
http://wiki.dglogik.com/dglux5_wiki:dataflow:dataflow_blocks_reference:table_operations:csv_writer

Last update: **2026/10/22 13:24**