Boolean

Block Group:	Variables
Icon:	

The Boolean block holds a value that can be only TRUE or FALSE.

For information on using dataflow blocks, see Dataflow.

Input/Output Property

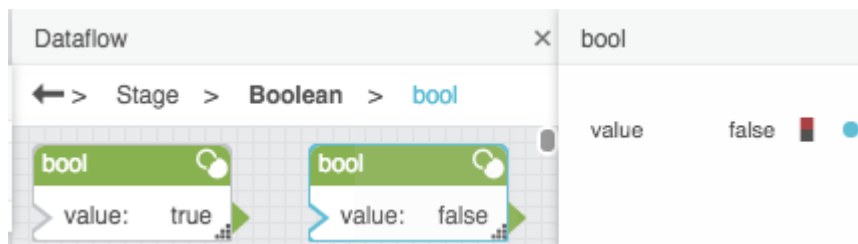The following property of the Boolean block can take input and give output.

- value *(boolean)*

value sets and returns the value of this Boolean block.

Examples

The following image demonstrates two Boolean blocks. The leftmost block holds a TRUE value. The rightmost block holds a FALSE value.

Previous: Number

Next: Color

From:
<https://wiki.dglogik.com/> - **DGLogik**

Permanent link:
https://wiki.dglogik.com/dglux5_wiki:dataflow:dataflow_blocks_reference:variables:boolean

Last update: **2021/09/20 15:03**